

MODEL AVM RECESSED FIRE HOSE CABINET WITH EQUIPMENT COMPARTMENT

NORMEKS model AVM is formed by two vertical compartments. Thanks to its unique railed system, both reel and extinguisher can go back and forth easily.



Model AVM has the following characteristics:


- Water supply is through the center of the reel.
- Hose reel is 70 micron RAL 3001 red electrostatically powder painted.
- Fire hose cabinet is RAL 9002 grey white or RAL 3001 red, 70 micron RAL 3001 red electrostatically powder painted.
- Semi-rigid rubber hose is manufactured in accordance with EN694 Standard.
- 1" ball valve
- 3 positioned stainless brass reel core with sealing.
- Adjustable frame and double bended cabinet door made of 1.5 mmDKP steel.
- Cabinet door is right hand hinged. (Left hand hinged available upon request.)
- "In compliance with 92/58/EEC" sign located on the cabinet door.
- Operating and installation manual.

Portable extinguishers are shown as an accessory

Model	Hose		Dimension W x H x D	Order No
	Diameter (mm)	Length (m)		
AVM	25	20	350 x 1600 x 750	AVM - 20
AVM	25	20	350 x 1600 x 750	AVM - 30

Service and maintenance of the fire hose cabinets should be performed according to EN 671-3, service and maintenance standard and NORMEKS maintenance instructions. Please contact with NORMEKS for a service and maintenance contract.

- Manufacturer shall retain the right to make changes in the production standards and material without notice.
- Standard production door is made of steel; aluminum framed glass available upon request.
- Knockouts for pipework connection are on the right side of standard manufacturing.

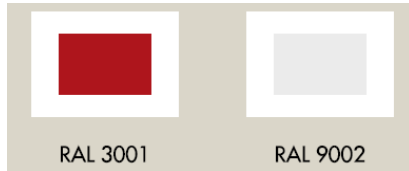

Our Standard production color is RAL 3001, please specify separately for RAL 9002.

© Norm Teknik Malzeme Tic.İnş.San. A.Ş. All Rights Reserved.

Eyüp Sultan Mah. Başkent Cad. No:6/1 34885
Samandıra - Sancaktepe / İSTANBUL/TURKEY
Tel: +90 216 311 40 41 pbx Fax: +90 216 311 90 91
www.normteknik.com.tr norm@normteknik.com.tr