

MODEL KYD-B2 RECESSED FIRE HOSE CABINET WITH FOAM MIXER

NORMEKS® model KYD-B2 is suitable for recessed mounting. The reel is secured on a 180° hanged support and mounted on the right hand side of the cabinet.




Model KYD-B2 has the following characteristics:

- Adjustable frame and double bended cabinet door made of 1.5 mm DKP steel.
- Cabinet inside box is made of 1.2 mm DKP Steel.
- Hose reel is 70 micron RAL 3001 red electrostatically powder painted.
- Fire hose cabinet is RAL 9002 grey white or RAL 3001 red, 70 micron RAL 3001 red electrostatically powder painted.
- 25 lt. AFFF foam
- To DIN 14384, 1% to 6% adjustable, 200 lt /min capacity, 2 "foam proportioner (AWG).
- Ø19 mm foam suction hose.
- 1" controlled lans.
- 2" full bore ball valve.
- 2"-20 m of flat hose (TS 9222).
- Semi-rigid rubber hose is manufactured in accordance with pr.EN694 Standard.
- NORMEKS door lock is made of circular chrome.
- Sign in compliance with the 92/58/EEC is located on the cabinet door.
- Reel can swing through 180°, which allows pulling the reel in any direction.
- Sleeve couplings of the hose are connected by clamps or wiring.
- User and installation manual.

Model	Hose		Dimension W x H x D	Capacity (l)	Order No
	Diameter (mm)	Length (m)			
KYD-B2	2"	20	1100 x 900 x 350	25	KYD-B2-20-25

Service and maintenance of the fire hose cabinets should be performed according to service and maintenance standard pr. EN 671-3 and NORMEKS maintenance instructions. Please contact with NORMEKS for a service and maintenance contract.

- Our products are manufactured in compliance with TS. EN 671-2.
- Manufacturer shall retain the right to make changes in the production standards and material without notice.
- Standard production has doors made of steel; plexiglas or hardened glass options are available upon request.

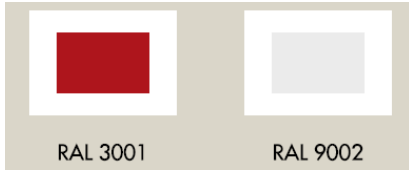

Our Standard production color is RAL 3001, please specify separately for RAL 9002.

© Norm Teknik Malzeme Tic.İnş.San. A.Ş. All Rights Reserved.

Eyüp Sultan Mah. Başkent Cad. No:6/1 34885
Samandıra - Sancaktepe / İSTANBUL/TURKEY
Tel: +90 216 311 40 41 pbx Fax: +90 216 311 90 91
www.normteknik.com.tr norm@normteknik.com.tr