

## MODEL ST22-YT-DK SURFACE FIRE HOSE CABINET WITH EQUIPMENT COMPARTMENT

NORMEKS® model ST22-YT-DK is suitable for surface mounting and has a compartment for portable fire extinguisher. The reel is secured on a 180° hanged support and mounted on the right hand side of the cabinet. This model's valve-hose connection is based on DIN 14461 standard.



### Model ST22-YT-DK has the following characteristics:


- Water supply is through the center of the reel.
- Hose reel is 70 micron RAL 3001 red electrostatically powder painted.
- Fire hose cabinet is RAL 9002 grey white or RAL 3001 red, 70 micron RAL 3001 red electrostatically powder painted.
- NORMEKS jet / spray / shut-off nozzle is manufactured in accordance with pr.EN671-1.
- Semi-rigid rubber hose is manufactured in accordance with pr.EN694 Standard.
- 2" landing valve and special valve mounting adaptor.(reduction with 2"-1" storz coupling )
- 3 positioned stainless brass reel core with sealing.
- Cabinet is completed with chromium nickel plated concealed hinge. (Left or right side hinged as per order.)
- Stainless steel made recessed handle.
- One of 75 mm knockouts for pipework connection is included.
- Sign in compliance with the 92/58/EEC is located on the cabinet door.
- Reel can swing through 180°, which allows pulling the reel in any direction.

Portable extinguishers are shown as an accessory

Model	Hose		Dimension W x H x D	Order No
	Diameter (mm)	Length (m)		
ST22-YT-DK	25	20	700 x 900 x 250	ST22-YT-DK - 20
ST22-YT-DK	25	20	700 x 900 x 200	ST22-YT-DK-20-20
ST22-YT-DK	25	30	700 x 900 x 250	ST22-YT-DK-30

Service and maintenance of the fire hose cabinets should be performed according to service and maintenance standard pr. EN 671-3 and NORMEKS maintenance instructions. Please contact with NORMEKS for a service and maintenance contract.

- Our products are manufactured in compliance with TS. EN 671-1.
- Manufacturer shall retain the right to make changes in the production standards and material without notice.
- Knockouts for pipework connection are on the right side of standard manufacturing. If it is required to be on the left side, please specify in your order.

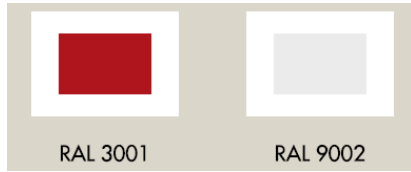

Our Standard production color is RAL 3001, please specify separately for RAL 9002.

© Norm Teknik Malzeme Tic.İnş.San. A.Ş. All Rights Reserved.

Eyüp Sultan Mah. Başkent Cad. No:6/1 34885  
Samandıra - Sancaktepe / İSTANBUL/TURKEY  
Tel: +90 216 311 40 41 pbx Fax: +90 216 311 90 91  
[www.normteknik.com.tr](http://www.normteknik.com.tr) [norm@normteknik.com.tr](mailto:norm@normteknik.com.tr)